


AMX Connector Cover Replacement Instructions:

Tools:

- T-15 Torx driver
- 3/16 nutdriver
- #1 Phillips screwdriver

Procedure:

1. Remove torque screw located at attachment point A.
2. Install Jackscrew at attachment point A.
3. Press new connector cover onto Jackscrews at points A and B
4. Install Truss Screws at attachment points A and B to secure connector.

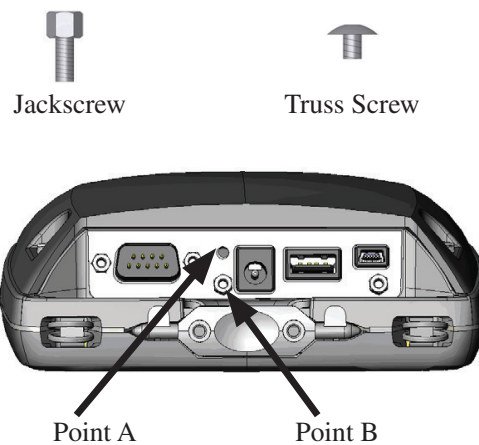

P/N 23018-00 (kit)